

## Verbatim LED Tube T8 G13 1200mm 22W 2000lm 6500K

- G13 Socket
- 220-240V
- 40,000 hours Lifetime
- Luminous Flux: 2000 lm



Product Number	52702
<b>General Data</b>	
Lamp Socket	G13
Design	LED T8 Tube
<b>Electric Data</b>	
Wattage (W)	22
Voltage (V)	220-240
Dimmable	no
Power Factor	0.90
Operating Frequency (Hz)	50-60
<b>Geometric Data</b>	
Length (mm)	1213
Diameter (in mm)	28 x 32
Weight (g)	350
<b>Photometric Data</b>	
Luminous Flux (lm)	2000
CRI	80
CCT (K)	6500
Beam Angle (°)	120
Luminous Efficacy (lm/W)	90.91
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-35 - 45°C




04/08/2014

## Lifestyle image




## Technical Drawings

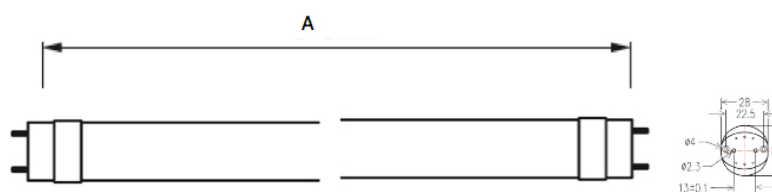

04/08/2014

Photometric Diagrams

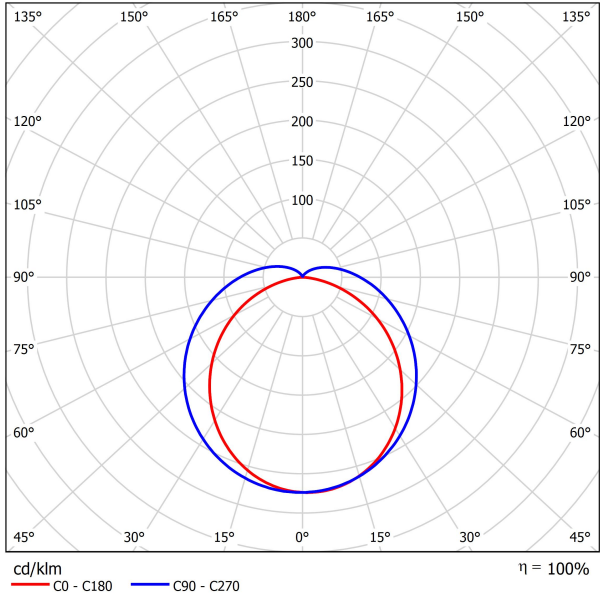


Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	1.57 1.41	E(0°) 2256 E(C90) 175 E(C0) 220
1.0	3.14 2.81	E(0°) 564 E(C90) 44 E(C0) 55
1.5	4.71 4.22	E(0°) 251 E(C90) 19 E(C0) 24
2.0	6.28 5.63	E(0°) 141 E(C90) 11 E(C0) 14
2.5	7.85 7.04	E(0°) 90 E(C90) 7 E(C0) 9
3.0	9.42 8.44	E(0°) 63 E(C90) 5 E(C0) 6

Distance [m] Cone Diameter [m] Illuminance [lx]

— C0 - C180 (Half-value Angle: 109.2°)

— C90 - C270 (Half-value Angle: 115.0°)

Energy Rating

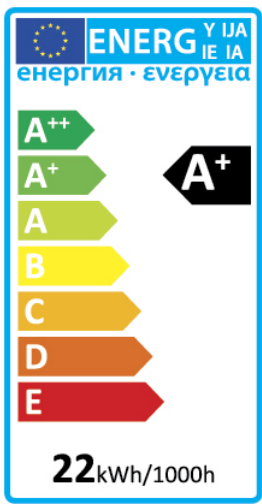

Technical Packaging Details

<b>Barcode</b>
023942527022
<b>EAN 128</b>
(02)00023942527022(37)04(91)803
<b>EAN 14</b>
50023940527027
<b>Pack Dimensions(HxWxL)</b>
35 x 33 x 1295 (mm)
<b>Pack Weight</b>
480 (g)
<b>MOQ</b>
10
<b>Carton Dimensions (HxWxL)</b>
90 x 180 x 1325 (mm)
<b>Cartons/Pallet</b>
36
<b>Layers/Pallet</b>
9
<b>Units/Pallet</b>
360

04/08/2014